

Optical Read-out Head

Can be connected to computer or MULTITERM Pro

No supply required

Complies with IEC 1107/EN 61107

Designed for use with MULTITERM Pro, Kamstrup meters and M-Bus Master

Robust construction

USB or D-Sub connector



Application

The optical read-out head is used to transmit data from energy meters, electricity meters and similar measuring equipment to computers and hand-held terminals via an optical data port.

Applications range from single data readings, e.g. for accounting purposes, to more comprehensive programming of meters.


The optical read-out head is fitted with a permanent magnet, which ensures that the head remains securely on the meter during data acquisition. Data is transmitted via an infrared light. The read-out head has – as do meters – both a transmitter and receiver for serial, two-way communication.



Kamstrup A/S
 Industrivej 28, Stilling
 DK-8660 Skanderborg
 TEL: +45 89 93 10 00
 FAX: +45 89 93 10 01
 info@kamstrup.com
 www.kamstrup.com

Technical data and principle diagram


Baud rate	Max. 2400 bit/sec.
Connection control	Echo from TD to RD
Ambient temperature	-10°C...+55°C
Storage temperature	-20°C...+70°C
Enclosure	IP53
Cable length	Approx. 1.5 m
Dimensions	Dia. 32 x 33 mm
Weight	Approx. 0.1 kg

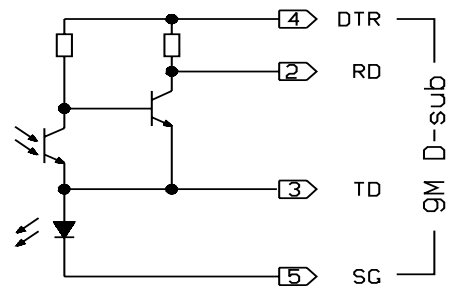

Directions for use and storage

The optical read-out head must **not** be used or stored in the vicinity of data media or computers as the magnet may damage data.

Always cover the magnet with the protective disc when the read-out head is not in use.

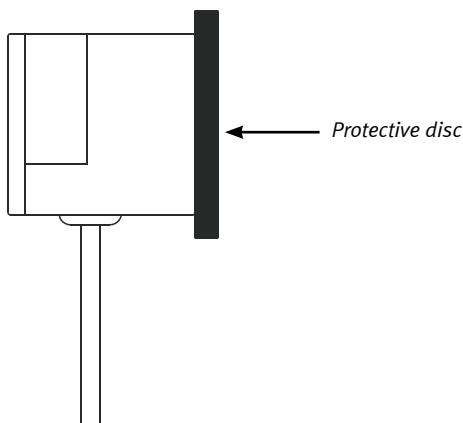

The cable from the readout head must always point downwards $\pm 20^\circ$.

Order specifications

Description	Type No.
Optical read-out head with USB plug	66-99-099
Optical read-out head with 9F D-sub plug	66-99-102
Optical read-out head with 9F D-sub plug (without Echo)	66-99-136
9M/25F D-sub adapter	66-99-120